




Professional LED Display

Compact solutions for presentation to the Meeting Room

- Sharp clear images with Full HD display.
- Sleek design for great aesthetic pleasure.
- Energy efficient LED backlight.
- Play media content directly from USB pen drive, with built in media player.
- High reliability with Longer product life and continuous operation.

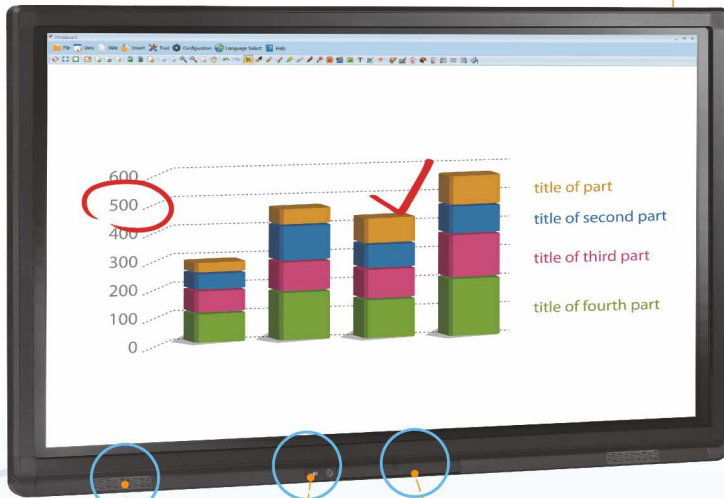

Light Sensor Detector



Speaker



AV Input / Output



Handle

★ Advanced Feature



Duo System

Built-in Android system, support Mini PC for Windows



Eco Friendly

"Our Professional LED Display" adopts LED backlight which offers a thinner panel, lower power consumption, better heat dissipation, brighter display and better contrast level and produce less pollution on disposal.



Easy Maintenance

Sophisticated mechanical design for easy maintenance. Only one person can operate the whole process of disassembly.

☐ Total Solution for Interactivity

☐ Project & Interact with PC/Gadgets wirelessly via WIPS



86" Display

Model Name	GM-86R
Backlight	LED
Panel Technology	Vertical Alignment (VA)
Screen Size	216 cm
Active Screen Size	86"
Display Ratio	16:9
Resolution	3840 x 2160 Pixel (UHD)
Display Colors	10 bit
Brightness	500 cd/m ²
Native Contrast Ratio	5000:1
Viewing Angle	178 (H):178 (V)
Response Time	6 ms
Bezel Width	13.2mm
AV Inputs / Outputs	Inputs: VGA, HDMI, DVI-D, Display Port, USB, RS232C, RJ45, Audio Outputs: HDMI, AV
Speaker Output Power	30W x 2
Communication Port	RS 232
Multimedia File Formats Support	Video: MPEG1, MPEG2, MPEG4, H264, RM, RMVB, MOV, MPEG, VC1, Divx, FLV(Support 1080P HD Decoding) Audio: WMA, Mp3, M4A, (AAC)
Power Consumption	Maximum < 495W Standby Mode < 0.5 W
Working Voltage	AC 100-240V, 50/60 Hz
Duty Cycle	24 x 7

Storage Conditions / Packing Information	
Storage Temperature / Humidity	-20°C ~ 60°C / 10% ~ 95%
Working Temperature / Humidity	0°C ~ 40°C / 10% ~ 95%
Outline Dimension	1903 x
Packing Dimension	1903.4 x 1090.5 x 105.1mm
Net Weight	50 KG
Gross Weight	77 KG
Standard Accessories	Power Cable, VGA Cable, User Manual, Remote Control, Wall-mount bracket

**Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.*

For Sales

Contact: +91 8588839434 Email: sales@globusinfocom.com



Globus Infocom Ltd.

A-66, Sector - 4, Noida - 201301 (U.P.)
E-mail: info@globusinfocom.com, Website: www.globusinfocom.com
Toll Free: 1800-4194-398

