



Multimedia Projector

Perform with excellence with our new Ultra Series Projectors



Ultra W30LU

★ Advanced Feature



Upto 10,000 Hours Long Lamp Life




22000:1 Contrast Ratio



Instant Restart + HDMI



±30 Degrees Keystone Correction

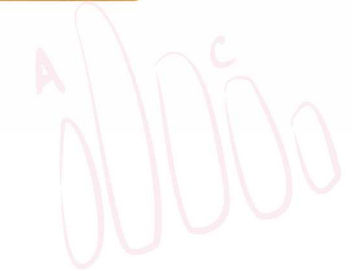

Specifications

Globus Ultra W30LU

Technology	3 LCD
Effective Display Area	15 mm x 3
Resolution Support	1600 x 1200 (UXGA) x 4
Native Resolution	1280 x 800 (WXGA)
Number of Pixels	1280 x 800 x 3 (3072000 pixels)
Brightness	3000 ANSI Lumens
Contrast Ratio	22000 : 1
Lamp Life (Modes)	5000 Hrs. (Normal), 10000 Hrs. (Eco)
Lamp Wattage	215W (Ultra pressure mercury lamp)
Zoom	1.3 Approx. Manual optical zoom / manual optical focus
Video Compatibility	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i,
Input Compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA, Mac
Projection Size	30" ~ 300"
Throw Ratio	1.36:1 to 1.77:1
Throw Distance	1.0 - 8.0m
Aspect Ratio	16:10
Inbuilt Speaker	2W
Input	VGA x 2, HDMI, Mini Jack (Audio), RCA, S-Video, RGB
Output	VGA, Mini Jack (Audio)
Control Ports	RS232, USB
Keystone Adjustment	ID, Vertical +/- 30 degrees
Horizontal Frequency	19~92 KHz
Vertical Scan Rate	48~92 Hz
Power Consumption	265W
Remote	Full Functional Remote Control
Power Supply	100 - 240V, 50/60 Hz AC
Operating Temperature	0° C to 40° C, 90% RH
Weight	2.1 kg
Accessories	Remote Control with battery, Power Cord, VGA Cable, User Manual CD

**Due to continuous product development, the specifications may change without prior notice.*

***Product image(s) are for illustrative purposes only and may differ from the actual product.*

For Sales

Contact: +91 8588839434 Email: sales@globusinfocom.com



Globus Infocom Ltd.

C -1/2, Safdarjung Development Area, New Delhi - 110016

E-mail: info@globusinfocom.com, Website: www.globusinfocom.com

Toll Free: 1800-200-4398

