



Pro Series

Human Body Temperature Detection Thermal Camera

MODEL: GNCW-PT02F02-TA

GNCW-PT02F02-TA



Applications

Educational Institutes, Hospital, Offices

Shops, Malls and other market places

Airport, Railway stations etc.



Human Body Temperature Detection Thermal Camera

Model: GNCW-PT02F02-TA
(Pro Series)

Globus range of Thermal Cameras are pre-configured to work with extreme accuracy in Temperature Measurement applications to find temperature deviations in a Controlled and Un-controlled Environment by utilising difference temperature alarms with a dynamically updated reference temperature. In addition, our range of thermal cameras provide an affordable and accurate temperature measurement solution for anyone who needs to solve problems that need built-in "smartness" such as Temperature analysis, alarm functionality and autonomous communication using standard protocols. Globus range of Thermal Cameras also have all the necessary features and functions to build distributed single or multi-camera solutions utilising standard Ethernet hardware and software protocols.

Screening difference temperature alarm with a dynamic updated reference temperature

Color Palettes Black-Heat/ White-Heat/ Rainbow/Iron-Red up to 17 modes

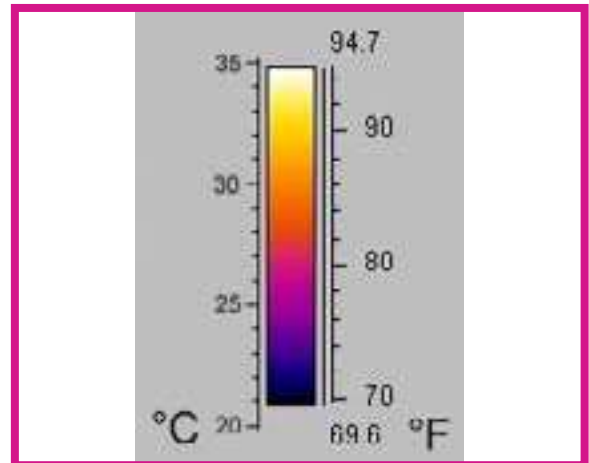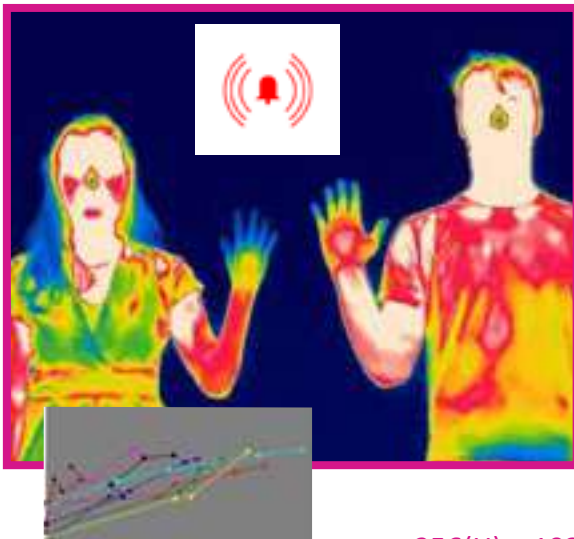

256(H) × 192(V) - Thermal effective pixel



Sharper Image with NETD $\leq 60\text{mK}$



Meets the ASTM standards $\pm 0.5\text{ }^\circ\text{F}$ accuracy



Technical Specifications

Solution Overview

- Screening difference temperature alarm with a dynamic updated reference temperature.
- 256(H) x 192(V) - Thermal effective pixel , 1920(H) x 1080(V) Optical effective Pixel.
- Extensive alarm functionality, as a function of analysis and more.
- Thermal: 4mm Fixed lens, Optical: 4mm Fixed lens.
- Open and well-described TCP/IP protocol for control and set-up.
- Built-in extensive analysis functionality.
- Encode Video Stream H.265, H.264.
- Temperature Range 5 $^\circ\text{F}$ ~ 302 $^\circ\text{F}$.
- Accuracy $\pm 0.5\text{ }^\circ\text{F}$ with blackbody.
- Thermal Sensitivity (NETD) $\leq 60\text{ mK}$ (@25 $^\circ\text{C}$.F#=1.1)
- Metal Housing with IP66 Ingress Protection.


Thermal Sensor

Detector Type	Vox Uncooled Focal Plane Arrays
Effective Pixels	256 x 192
Detector Pitch	12 μm
Thermal Sensitivity (NETD)	$\leq 60\text{mK}$ (@25 $^\circ\text{C}$.F#=1.1)
Spectral Range	8~14 μm
Lens Type	Fixed Lens
Focal Length	4mm
Angle of View	H: 35 $^\circ$, V: 27 $^\circ$
Streaming Resolution	Main Stream Video: D1 @25/30fps, Sub Stream Video: CIF @25/30fps

Optical Sensor

Image Sensor	1/2.8" Sony CMOS
Effective Resolution	1920(H) x 1080(V)
Shutter Speed	1s to 1/100,000s
Wide Dynamic Range	Support
Min. Illumination	Color: 0.005lux @ F1.1; B/W: 0.0005lux @ F1.1
S/N Ratio	More than 55dB
Focal Length	4mm
Angle of View	H: 84 $^\circ$, V: 45 $^\circ$
Focus	Fixed Lens
Zoom	16x Digital, interpolating zooming on images
Streaming Resolution	Main Stream Video: 1920 x 1080/1280 x 720 @25/30fps, Sub Stream Video: D1/ VGA/ 640 x 360/ CIF/ QVGA @25/30fps.

Video and Audio Data	
Video Streaming	Dual Streams
Video Compression	H.265, H.264, MJPEG
Bit Rate Control	CBR/ VBR
Audio Compression	G 711u/G711a/G.7221/MP2L2/G.726/PCM
Audio Interface	1ch Audio In,1ch Audio Out
Power	
External Power Operation	DC12V
Power Consumption	Max. 10W at 12V DC typical and PoE typical.
Connections and Communications	
Digital Outputs	1 Channel Output Port
Ethernet	For control, result, image, and power
Ethernet Communication	TCP/IP
Ethernet Power	Power over Ethernet, PoE IEEE 802.3af class 3
Ethernet Protocols	TCP/IP, ONVIF, GB/T 28181, DHCP, RTP, RTSP, PPPoE, UPnP, UDP, Onvif
Ethernet Standard	IEEE 802.3
Multicast	Yes
Measurement	
Detection Mode	Body temperature monitoring
Temperature Alarm	Over temperature alarm
Accuracy	± 0.5 °F with blackbody; Detection Distance: 2~3m (2.5m recommended); Working Environment: Avoid the interference of wind, sunshine, high temperature and reflective objects, indoor is recommended
Temperature Range	5 °F ~ 302 °F
Blackbody	
Temperature Range	104 °F Ambient temp. 41~122 °F
Temperature Resolution	0.1°F
Accuracy	±0.3 °F (@104 °F)
Stability	± (0.1~0.3) °F / 30min
Environmental Data	
Operating Temperature Range	-30 °C ~ 60 °C (-22 °F~140 °F), 0~ 90% RH
Power System	
Power Supply	12 VDC, 10W max.
Physical Data	
Ingress Protection	IP66
Casing	Metal
Dimensions	246 x 101x 81 mm
Weight	1Kg



*Due to continuous product development, the specifications may change without prior notice.

**Product image(s) are for illustrative purposes only and may differ from the actual product.



Corporate Office:

A-66, Sector-4, Noida, District Gautam Buddha Nagar, U.P., India - 201301

☎ 0120-4051700/800 ☎ 0120-4051827 ✉ info@globusinfocom.com

📞 For Sales: 0 85888 39434 🌐 www.globusinfocom.com