

Application Areas



Corporate Offices




Meeting Rooms,
Training Rooms



Schools, Colleges
Universities



Huddle Rooms,
Conference Rooms
Seminar Halls



and many more...



Digital Projectors

Long Throw Full HD Projectors (Impact Series)

Globus Long Throw Digital Projector is equipped with superior picture quality, long-life and reliability to amplify any lesson, meeting or seminar with vivid colours, bold graphics and razor-sharp clarity. Our long throw projectors work on DLP technology for high-end and reliable performance.

Nationwide Sales & Service Presence



Corporate Office: A-66, Sector-4, Noida, District Gautam Budh Nagar, Uttar Pradesh - 201301, India | **Phone:** +91-120-4051700, 4051800
Email: info@globusinfocom.com | **www.globusinfocom.com**





Ordinary Projector



Globus Digital Projector


High Luminosity and Amazing Colour Accuracy

DLP technology produces bright and vivid images with amazing colour accuracy even in rooms with high ambient conditions. Enhance your presentation/ classroom or meeting sessions with its high luminosity.



Reduced Shadow Interference

With our Long Throw Projectors, interfering shadows or glare won't be a hindrance for your presentation, seminar, meeting or classroom session. It is equipped with a throw ratio as low as 1.5 that allows you to project a large screen even from a very short distance.

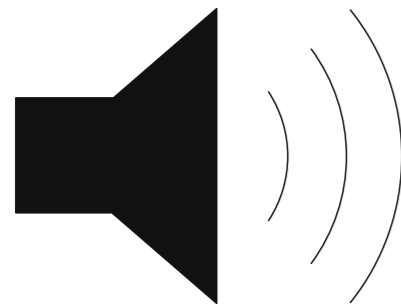

Inbuilt Speaker

Users can enjoy playing multimedia files like videos, animations, etc. on our Short Throw Projector with an inbuilt sound output. No hassles of connecting an external audio output device. It comes with an inbuilt 2W speaker for high fidelity sound output.



Advanced Energy Saving Features

Our projectors deliver long-term, maintenance-free operation owing to its long lamp life reducing the total cost of ownership (TCO) for the users. The Economy Mode lets users extend the lamp life by optimizing image brightness accordingly.

Technical Specification

Long Throw Full HD Projectors (Impact Series)

Model	Impact-LHDV3	Impact-LHDV4	Impact-LHDV5
Projection System	0.47" 1080p		
DMD Type	DC3		
Display Color	1.07 Billion Colors		
Native Resolution	1920 x 1080 (Full HD)		
Resolution Support	VGA (640 x 480) to WUXGA_RB (1920 x 1200) *RB-Reduced Blanking		
Brightness	4000 ANSI Lumens		
Contrast Ratio	12000 : 1 (with SuperEco mode)		
Lens	F=2.0-2.05, f=15.843-17.445mm		
Projection Offset	110% ±6%		
Light Source Type	Lamp		
Light Source Life (Normal Mode)	6000	8000	10000
Image Size	30"-300"		
Optical Zoom	1.1x		
Digital Zoom	0.8x - 2.0x		
Throw Ratio	1.5-1.65		
Throw Distance	1m-10.96m (100"@3.32m)		
Input Ports	HDMI x 2, Computer in (share with component) x 1, Audio In (3.5mm) x 1		
Output Ports	Monitor Out x 1, Audio Out (3.5mm) x 1, USB Type A (Power) x 1		
Control Ports	Rs232 x 1, USB Type Mini B (Services) x 1		
Keystone Adjustment	±40° Vertical		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	15K-102KHz		
Vertical Scan Rate	23-120Hz		
Lamp Watt	203W		
Inbuilt Speaker	2W		
Audible Noise	31dB (Normal Mode); 27db (Eco Mode)		
Power Supply	100 - 240V ±10%, 50/60 Hz AC		
Power Consumption	Normal: 260W; Standby: <0.5W		
Operating Temperature	0° C to 40° C, 0-90% RH		
Weight	3.6 kg		
Physical Dimensions (mm)	332 x 135 x 216 (W x H x D)		
Packaging Dimensions (mm)	417 x 207 x 336 (W x H x D)		
Accessories	Power cable, VGA cable, remote control, user manual CD		
Special Features	Virtual OSD Control via VGA, Super Color, Auto Power On/ Off, Sleep timer, Power Saving, Presentation Timer, Password Protection, 3D Blu-ray, 3D ready, audio and VGA pass through, Keypad Lock, 3x fast input, high altitude mode		

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.