



# SAFE IS THE NEW SMART



2MP PTZ Network Bullet Camera with 12x Optical Zoom

Model: GNCS-DB0U99 (Dazzle Series)



## Application Areas



City Surveillance



Railway Station



Industrial Plant



Crowded Public Places



Government Office



Outdoor Perimeters

## **PTZ Network Bullet Camera**

GNCS-DB0U99 Globus PTZ Network Bullet Camera is a high-performance, multi-functional security & surveillance solution that's ideal for wide area of coverage. It can perform optimally for wide-area surveillance even in challenging environment; from perimeters of organizations, parking lots, entrance, etc. With the help of its Pan, Tilt and Zoom capabilities, it creates high resolution images in a wider area, serving as a one-stop solution for outdoor surveillance.

Powered by Sony Starvis Sensor, it brings on board an image processing that transcends excellence, clarity, and high performance at Full HD resolution. Its extra-wide dynamic range assures clear and balanced video images even in too bright or too dark lighting conditions, where its conventional counterparts struggle. With high frame rates, Globus PTZ Network Bullet Camera let users recognize, analyse and assess split-second footages with unprecedented precision.

The advanced processing engine of Globus PTZ Network Bullet Camera can even de-blur images of moving objects in real time for fast camera pans. The continuous, noise-less PTZ operation of our cameras lets users immediately pan on the area of interest while the powerful optical zoom grabs the details of the scene without losing clarity.

Crafted with excellence of round the clock performance and high reliable output, Globus PTZ Network Bullet Camera can operate under challenging conditions like direct sunlight, rain, dust, etc. Coupled with Smart Video Analytics, our security & surveillance solutions support ONVIF for simplified integration with a wide range of platforms and hardware.

### **Sony Starvis Sensor**



Globus Network CCTV Cameras are engineered with Sony Starvis Sensors, featuring back-illuminated pixel technology, these sensors are deemed to be one of the best-performing imaging technologies in the current market trends. Equipped with this sensor, Globus Network Cameras provide ultimate scenic detail, colour rendition and ultra-low-light performance with Prior Low Noise Circuit™ (PLNC) technology for better SNR. It features a sensitivity of 2000 mV or more per 1  $\mu\text{m}^2$  (color product, when imaging with a 706 cd/m<sup>2</sup> light source, F5.6 in 1 s accumulation equivalent) to render razor-sharp images with life-like detailing and colour reproduction. It deploys Multiple HDR filter to further increase the image quality.

### **60 FPS**

Frame rates play a crucial role in determining the quality of video recorded by CCTV camera, users can reduce their bandwidth consumption while enhancing the detailing in the recorded images by choosing the cameras with high frames per second. Globus Network Cameras are equipped with imaging technology that captures videos in high frame rate of 60 FPS for smooth and even images of moving objects.



### **True Wide Dynamic Range**



Globus Network CCTV Cameras are concocted with 144dB True WDR hence able to control the exposure as well as process the light values of each pixel in the image. Using 144dB WDR, the Globus range of cameras capture a balanced image with optimal exposure for all areas within the camera's field of view. In other words, Bright spots are toned down to prevent the image from being washed out, and the dark images are augmented to expose the objects in the shadows. This, in turn, enables the camera to go in places that would normally require expensive lighting controls/equipment.

### **IK10**

Globus range of Network cameras are among the highly protected range of cameras compliant to IK10 standards (EN 62262 and IEC 62262) which means that the camera can be used in applications with high rates of vandalism. In addition, a Security Camera that is IK10 rated will generally withstand a variety of elements better than commercial grade standard Dome or Bullet Style Cameras.



### Triple Stream




Globus Network CCTV Cameras support multiple streams allowing a single camera to transmit triple streams at different resolutions, frame rates and codecs. It preserves the client-side bandwidth and processing power providing a wide extensive usage with a single installation itself. Triple streams provide much more flexibility to users by allowing different data streams to be sent simultaneously for smoother video streaming.

Globus Network Cameras support triple streams:

- Primary stream: full resolution
- Secondary stream: low resolution
- Tertiary stream: flexible choice (dynamic or low resolution).

### H.265+ Compression Technology

The optimized version of H.265 compression technology, it uses a scene-adaptive encoding technology, dynamic ROI, intelligent noise reduction, flexible multi-frame reference, etc. to deliver high quality images while utilizing lower bandwidth and storage space. It reduces the bit rate and storage requirements of the recorded videos by up to 70% as compared to its predecessor.



### Starlight Technology

Powered by Starlight Technology, Globus Network Cameras are designed specifically to perform even under challenging lighting conditions. Our cameras offer astounding light sensitivity, colour rendition even in low light down 0.001 lux. It uses its optical features to balance light throughout the scene and produce coloured images in dark environments. Our cameras produce full colour images in the dark with utmost detail where most of the conventional counterparts switch to monochrome. Aided by Starlight technology combined with other impressive technical specifications, Globus Network Cameras are the ultimate 24x7 surveillance cameras in the market.



### Auto Tracking PTZ

Globus Auto Tracking PTZ mechanism lets users automatically control the pan, tilt and zoom mechanism of the camera for optimized camera view. The camera locates the objects of interest on the site and focuses, tilt and zoom accordingly to fetch high quality images. Even for objects out of view, it pans and directs automatically without human intervention to provide holistic surveillance to your property.



### AI powered Video Content Analytics

The inbuilt AI-powered Video Analytics packs cutting-edge concepts and delivers more efficient, streamlined and hassle-free video assessment. It deploys artificial intelligence to cameras by analysing video content in real-time and fetches suitable inferences. It reliably detects, tracks and analyses object in its field of view and alerts users with preset alarms on incidents. A smart system of alarm rules out false alarms to minimum and makes surveillance from Globus Network Cameras more automated requiring minimal human intervention. Clubbed with features like Advanced motion detection, Camera tampering detection, People counting, Region entrance detection, Region departure detection, Line crossing detection, Loitering detection, Human presence detection, Left Object detection, Object removal detection, etc, Globus AI-Powered Video Analytics makes for a holistic and all-inclusive surveillance solution for every organization's security requirements.



### SIP/VoIP

Globus Network Cameras support the SIP Protocol to enable users to use each camera as an extension on a PBX. This feature enables operators to communicate verbally using the camera itself. It eliminates the need to install a paging system and combines both surveillance and communication into a single package. Owing to its SIP protocol, Globus Network Cameras enable users to make a call and transmit live-view as well as real-time sound to receiver's VOIP telephone in case certain incidents, which is faster and efficient than sending an email. Furthermore, it also reduces the traditional call costs.



### ONVIF G, Q, S, T compliance

Globus Security Systems support ONVIF profiles G, Q, S and T to ensure effective interoperability of our Network Cameras with other industry products. All our IP products are 100% ONVIF compliant and support all the features like video & audio streaming, pan-tilt-zoom control & relay output, site info & configuration, event & alarm management, etc.



### Edge based SD Card Recording

To increase its usability, Globus Network Cameras come with Edge SD Card Recording support. This feature also serves as a saviour during network or server burnouts.




### Alarm In/Alarm Out

For efficient, smart and responsive event management, Globus Network Video Recorders supports Alarm-In and Alarm-Out functionality. This enterprise-level alarm triggering mechanism supports various alarms and alerts in case of specific events. It strengthens users' security and surveillance infrastructure and improves its overall efficiency.

### IP67

For the most demanding outdoor conditions, Globus range of Network Cameras are armoured with IP67-rated housing. This state-of-the-art camera has IP67-rated housing and can even be immersed in water for a period of time. Ideal for use in extreme environments, this camera stand up to wind, rain, heat wave, snow, dust and more. This camera is a great solution for video surveillance of Safe-City, Main Gates, Perimeter walls and many more.



### 3-Axis Product Design

The 3-Axis design of Globus Network Cameras provides wider coverage area for a comprehensive surveillance. The focus area can be adjusted as per the scene even remotely, to ensure that you get everything under radar round the clock. The varifocal lenses of Globus Network Camera make a huge difference to your security & surveillance infrastructure with greater and widespread vigil.

## 2MP PTZ Network Bullet Camera with 12x Optical Zoom


Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Effective Pixel	1920x1080
RAM/ROM	512MB/128MB
Min. Illumination	Color: 0.001Lux@F1.2, B/W: 0Lux with IR on
Shutter Speed	1s ~ 1/100000s
Lens	5.3mm ~ 64mm, Automatic Focusing & Motorised Zoom Lens
Optical Zoom	12x Optical Motorised Zoom
Digital Zoom	16x Digital Zoom
Field of View	Horizontal: 61°~5° Vertical: 36°~2° Diagonal: 69°~5°
Aperture	F1.6~F2.8
Iris Type	Auto
Signal System	PAL/NTSC
S/N Ratio	>60dB
Day/Night	ICR Filter Auto Switch
IR Distance	Up to 150m
Wavelength	850nm
Video	
Video Compression	H.265+, H.265, H.264+, H.264
Streaming Capability	Triple Streams Individually configurable (H.265+,H.265,H.264)
Frame Rate	Primary Stream: 60fps@1920x1080, 1280x960, 1280x720, 704x576
	Secondary Stream: 60fps@704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180 320x192, 320x180
	Tertiary Stream: 30fps@1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x180
Video Bit Rate	16Kbps~16Mbps (CBR/VBR Adjustable)
Image	
Wide Dynamic Range (WDR)	144dB WDR

Back Light Coompensation (BLC)	Supported
High Light Compensation (HLC)	Supported
Auto Exposure	Auto Level Control
Electronic Image Stabilization (EIS)	Supported
Privacy Masking	Supported (8 Areas, Rectangular)
ROI	Supported (8 Areas, Rectangular)
Defog	Supported
Digital Noise Reduction	2D/3D DNR
Image Setting	Brightness, Contrast, Saturation, Auto Gain, Sharpness, Image Rotation
Image Enhancement Function	AWB, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark
<b>Audio</b>	
Audio Compression	N/A
Audio Streaming	N/A
Audio Input	N/A
Audio Output	N/A
<b>PTZ</b>	
Pan Range/Pan Speed	360°endless / Pan Manual Speed: 0.1°~50°/s, Pan Preset Speed: 50°/s
Tilt Range/Tilt Speed	-45°~30°(Auto Flip) / Tilt Manual Speed: 0.1°~25°/s, Tilt Preset Speed: 25°/s
Proportional Zoom	Supported
Preset Quantity	300
Preset Freezing	Supported
Patrol	8 Patrols, up to 48 presets each patrol Pattern
Pattern	4 Patterns
Auto Tracking	Supported
Power Off Memory	Supported
PTZ Position Display	ON/OFF
Advance Function	Auto Scan, Auto Home, Preset Freezing, 3D Positioning, PTZ Limits, Initial Position
<b>Events</b>	
Event Trigger	Motion Detection, Network Disconnection, External Input, Audio Alarm, Pre/Post Alarm Buffer.

Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, PTZ Motion, White LED, HTTP Notification.
Video Content Analytics (VCA)	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed, Detect and capture faces, get real-time snapshots, Count the number of people entering or exiting, up to 4 detection areas for regional people counting.
<b>Local Storage</b>	
Memory Card Slot	Supported up to 256GB Micro SD.
ANR	Supported, Auto store video in SD card when NVR is disconnected; Upload video to NVR when connection is resumed.
<b>Alarm Interface</b>	
Alarm Input	1 Channel Input
Alarm Output	1 Channel Output
<b>Network</b>	
Ethernet	1*RJ45 10M/100M Ethernet Port
IP Support	Static, Dynamic
Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPnP, Bonjour, SIP, SNMP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
AES Encryption	AES256 Supported
IP Address Filtering	Supported
Multi-Level User ID/ Password	Supported
Network Storage	NAS(Support NFS, SMB/CIFS)
SIP/VoIP	Supported
Web Viewer	IE, Chrome, Firefox, Safari
Management Software Function	Globus CMS
Mobile Application	GloView Pro
System Compatibility	Onvif Profile G, Q, S, T
User/Host	20
<b>Environmental</b>	
Power Supply	PoE (802.3at) / DC 12V/2A±10%
Power Consumption	15W Max, 20W Max(With IR on)
Surge Protection	6KV

Operating Temperature	'-40°C~65°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Casing	Aluminium
Dimensions	160mm X 273.5mm x 210mm
Weight	2Kg

### Exploded View

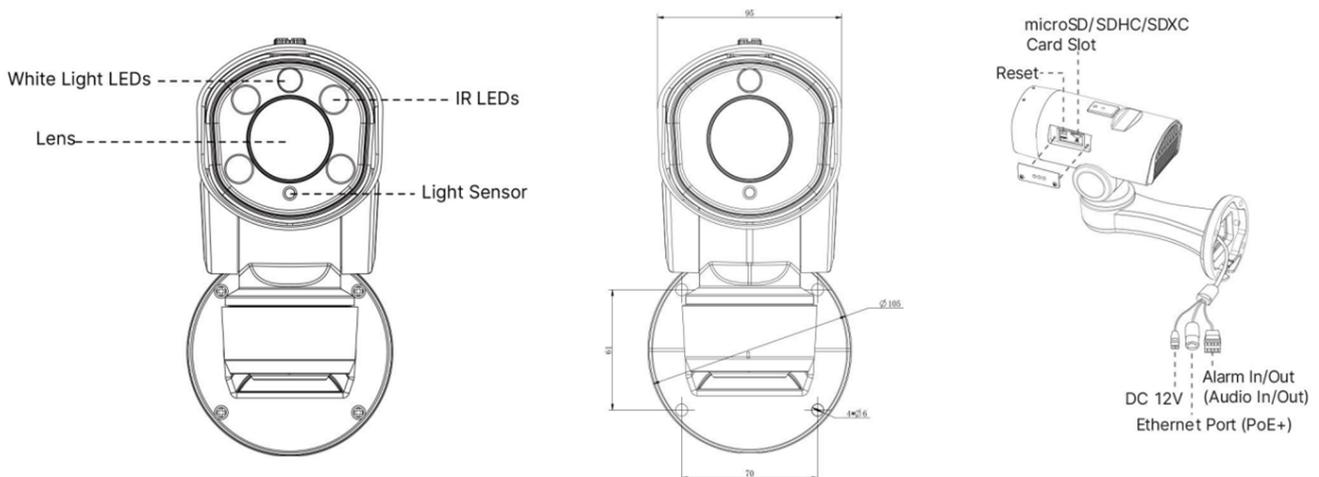

### About Globus Infocom

Globus Infocom is a pioneer of technological solutions in the field of Education Technology, Collaborative Conferencing & Professional Displays, Security & Surveillance and Healthcare & Wellness.

The company houses one of the most elaborate range of security solutions including Network Dome Camera, Network Bullet Camera, PTZ Cameras, Fish Eye Cameras, NVRs, DVRs, Mobile Surveillance, Body Worn Cameras, Switches, PoE and related accessories.

With its in-house Research & Development team and the zeal for constant innovation, Globus has developed an insight to understand what 21st century Security & Surveillance market demands. Owing to its nationwide sales and service support, Globus Infocom, a proud Make in India brand, has amassed more than 25,000 customers with 50% of repeat order ratio.