
Nationwide Sales & Service Presence





Corporate Office: A-66, Sector-4, Noida, District Gautam Budhha Nagar, Uttar Pradesh - 201301, India | Phone: +91-120-4051700, 4051800

Email: info@globusinfocom.com | www.globusinfocom.com

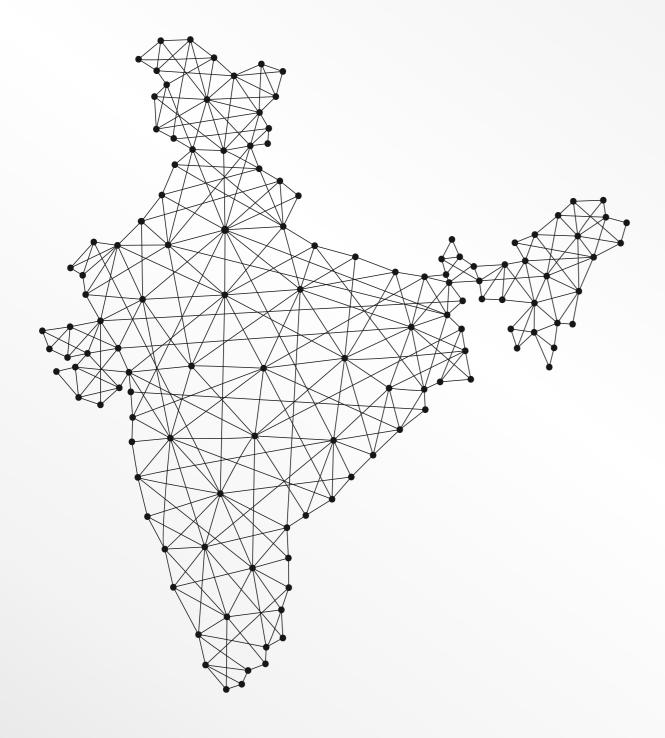





Digital Projectors

Model: Dazzle-LHDV8

Globus Long Throw Digital Projector is equipped with superior picture quality, long-life and reliability to amplify any lesson, meeting or seminar with vivid colours, bold graphics and razor-sharp clarity. Our long throw projectors work on DLP technology for high-end and reliable performance.









Ordinary Projector

Globus Digital Projector


High Luminosity and Amazing Colour Accuracy

DLP technology produces bright and vivid images with amazing colour accuracy even in rooms with high ambient conditions. Enhance your presentation/classroom or meeting sessions with its high luminosity.

Reduced Shadow Interference

With our Long Throw Projectors, interfering shadows or glare won't be a hindrance for your presentation, seminar, meeting or classroom session. It is equipped with a throw ratio as low as 1.55-1.70 that allows you to project a large screen even from a very short distance.





Inbuilt Speaker

Users can enjoy playing multimedia files like videos, animations, etc. on our LongThrow Projector with an inbuilt sound output. No hassles of connecting an external audio output device. It comes with an inbuilt 5W speaker for high fidelity sound output.

Advanced Energy Saving Features

Our projectors deliver long-term, maintenance-free operation owing to its long lamp life reducing the total cost of ownership (TCO) for the users. The Economy Mode lets users extend the lamp life by optimizing image brightness accordingly.



Technical Specification

WXGA Long Throw	Dazzle-LHDV8
Native Resolution	WXGA (1280x800)
Display Color	1.07 Billion Colors
Technology	One Chip DLP
Light Source	UHP Lamp
Brightness	3500 ANSI Lumens
Contrast Ratio	22000:1
Throw Type	Long Throw
Throw Ratio	1.55-1.70
Optical Zoom	1.1x
Digital Zoom	0.8X-2.0X
Projection Offset	100% (+/-5%)
Lens	F=2.56-2.68, f=22-24.1mm
Throw Distance	1m-10.98m (100"@3.34m)
Image Size	30"-300"
Keystone & Corner Correction	Vertical (± 40°) keystone correction
Lens Shift	± 5% vertical
Audible Noise	upto 31dB in Normal Mode, 27dB in Eco. Mode
Minimum Lamp Life	15000 Hrs in Normal Mode, 20000 Hours in Economy Mode
Input Ports	HDMI x 1, Computer in/VGA x 2, Composite video x 1, Audio In x 1
Output Ports	VGA out x 1, Audio Out x 1
Other ports	USB type B mini x 1, RS232 x1
InBuilt Speaker	5 Watts rms to deliver full range sound
Input Resolution Support	VGA(640 x 480) to Full HD(1920 x 1080)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Power Consumption	Normal: 260W, Standby: <0.5W
Input Power Supply	Power cable & connector
Accessories	All device driver and cables for connecting with computer and installation kit
Remote	Full function remote control

Manual Projector Screen	
Screen	8 x 6 feet, Matte White Surface
Mounting Type	Wall Mount

^{*}Due to continuous product development, the specifications may change without prior notice.

**Product image(s) are for illustrative purposes only and may differ from the actual product.