

Digital Podium

A modern and well organised presentation & lecture device for seamless presentations that make two-way interaction between the presenter and audience even more efficacious.

Key Features

- CRCA Steel Body
- Centralized Lock Mechanism
- Power socket for mobile/laptop charging.
- Wired and Wireless Microphones
- Inbuilt PC, Amplifier and Phantom power



1080p Full
HD Display



Built In
Speakers



Finger & Pen
Capacitive



Motorized
Tilt Display



Heat Dissipation
Fan Inbuilt



Display



* Due to continuous product development, the specifications may change without prior notice
** Product images are for illustration purpose only and may be different from the actual product



Interactive Panel

The advanced Electromagnetic Interactive Panel has a battery free pen for uninterrupted use. Its built-in annotation software enhances sessions by enabling live screen annotations, including highlighting, saving, editing, emailing, printing, and more.

Handheld/Collar/ Gooseneck Mic

We offer 3 types of Mics - Handheld, Collar & Gooseneck. Handheld mic to hold in the hand, Collar Mic for handsfree operation and Gooseneck Mic that can be adjusted or tilted accordingly.



Sliding Shutter

Interactive Panel in podium comes with a sliding shutter on top of it which is lockable. The purpose of providing lockable sliding shutter with panel is to keep it safe from unwanted breakage when not in use.

RFID/Passwords/ Keys Security

To keep your podium safe and secure, we provide three different types of unlocking & accessing options - RFID (i.e. Radio Frequency Identification), Numeric Password or with Keys.



* Due to continuous product development, the specifications may change without prior notice

** Product images are for illustration purpose only and may be different from the actual product




Keyboard & Mouse

We provide keyboard & mouse also for an organised experience at the time of presentation or any session. It can be conveniently placed in one of the cabinets provided in the podium.

Multimedia Controller

To connect your devices like laptops and PCs, our Digital Podium also includes a Multimedia Controller which acts as a central point for all the input ports and control buttons. It houses ports including HDMI, USB 3.0 x 2, VGA Port, Audio In ports available on front panel.



Built in Storage

Our podium come with built-in storage and a rack designed to securely accommodate computing devices such as a Mini PC, etc.



* Due to continuous product development, the specifications may change without prior notice

** Product images are for illustration purpose only and may be different from the actual product

Model No	DP 207C
Digital Podium	Free standing wheel mounted capable of moving in all directions with a facility of lock them while the Electronic podium is in use, polymer powder coated steel body enclosure with wooden top panels, designed to work in suitable environmental conditions, wooden top having lock and key and a sliding cover for opening/closing easily, housing and connectivity for visual presenter while the visualizer is in use and not in use, at the time of using the visualiser, drawer can be opened and Visualiser can be used, no port exposed on the outer body for breakage, cooling fans provided in the lower body
Display	Built-in highly sensitive Interactive Panel with adjustable Motorized tilt & a mechanism to make the Panel stable so that it does not shake while writing
Display Size	LED 21-inch IPS Technology
Resolution	1920 x 1080 Full HD
Brightness	350 cd/m ²
Contrast Ratio	1200:1
Colours	16.7M
Aspect Ratio	16:09
Response Time	8ms
Operational Hours	30000 Hours
Viewing Angles	178° horizontal, 178° vertical
Curvature	Flat
Colour Gamut	72%
Interactive Method	Electromagnetic resonance method
Touch Type	Pressure-sensitive, cordless, battery-free
Resolution	5080LPI
Pressure levels	8192 Levels
Tracking speed	266PPS
Touch Accuracy	±0.5mm(centre); ±1mm(edge)
Touch Response	First touch:30ms; Continuous touch:5ms
Touch Screen	Multi-touch Points
Control Buttons	Power, Menu, +/-, Auto
Connectivity	USB x 1, HDMI x 1, DVI x 1, VGA x 1
Pen Type	Battery Free EM Pen
Pen Control	Two Key and Pen tip Control
Interactive Method	Electromagnetic resonance method
Display Stand	Support tilting and Table standing type
Power Supply	12V DC
System Details	Compact 581
Processor	Intel Core i5 (10th Gen processor)
Small Form Factor	2 liters Volume
In-Built Wi-Fi /Wireless LAN Card	Inbuilt Wi-Fi / Wireless LAN Card

* Due to continuous product development, the specifications may change without prior notice

** Product images are for illustration purpose only and may be different from the actual product

RAM	16 GB
Storage	512 GB SSD
Ports	HDMI x 1, USB ports x 4, LAN Port x 1
Keyboard & Mouse	Wireless
Operating System	Windows 10
Controller	
Ports on front Panel of Controller	VGA, HDMI, USB3.0x2, Audio IN
Buttons on front Panel of Controller	Push buttons to control Volume Up& Down, Volume Mute and to switch sources of HDMI Visual Presenter, VGA Visual Presenter, HDMI Laptop, PC HDMI, VGA Laptop, VGA PC and Controller Power On/Off, Display Power on and Power Off
Ports on Rear Panel of Controller	USB 3.0 X 2, VGA Input x 2, VGA Output x 2, RCA Audio IN X 1, RCA Audio Output x 2, HDMI Inputx2, HDMI Outputx2 , Programming Port (Phoenix connector)
Built in HDMI Repeater	Yes (HDMI Output port support 15mtr HDMI cable)
Controller Resolution Output	4K (3840 x 2160) Native
Power	5 V DC (Suitable Adaptor supplied with controller)
Amplifier	
Inbuilt amplifier of 500 watt	
Gooseneck Microphone	
Gooseneck Microphone with XLR output. It Phantom powered so that there is no requirement of batteries thereby eliminating consumable cost. The gooseneck length at least 21.5 inch with ON/OFF switch and with LED light indicating ON/OFF status. The gooseneck microphone permanently polarized condenser, highly directional featuring hyper cardioid /lobar directivity.	
Power and other	
Power Supply	180 -240V, 50Hz, AC Supply
Sliding Trays	Provision for keeping laptop and Keyboard & Mouse
Security	Integrated authentication System having RFID, Password protection & Physical Key for secure access to system.
Logo	Provided with Acrylic logo
Front Display	System 27" Full HD inbuilt front display to display session related content, Video, Images etc.
Display type	IPS with LED backlight
Panel Active Area	23.53 x 13.24 in 59.78 x 33.63 cm
Display size (diagonal)	68.58 cm (27")
Viewing angle	178° horizontal; 178° vertical
Brightness	400 cd/m ²
Contrast ratio	5000:1
Response Ratio	5 ms
Product colour	Black

* Due to continuous product development, the specifications may change without prior notice


** Product images are for illustration purpose only and may be different from the actual product

Aspect ratio	16:09
Native resolution	FHD (1920 x 1080 @ 60 Hz)
Resolutions supported	1024 x 768; 1280 x 1024; 1280 x 720; 1280 x 800; 1440 x 900; 1600 x 900; 1680 x 1050; 1920 x 1080; 640x 480; 720 x 400; 800 x 600
Display features	Anti-glare; BrightView Panel; Language selection; LED Backlights; On-screen controls; Plug and Play; User programmable; Anti-static
User controls	Brightness; Color Control; Contrast; Exit; Image Control; Information; Input Control; Language; Management; Menu; Power Control
Input signal	DVI-D/ VGA/ HDMI
Operating temperature	5 to 40°C
Operating humidity:	20 to 80% RH
Power	Input voltage: 100 to 240 VAC
PC Specs for front Display	
Processor	Intel Atom
System Memory	2 GB RAM
Flash Memory	32 GB
Graphic	Intel HD Graphics
OS Supported	Windows 10 / Ubuntu / Android
Interface	HDMI x 1 /VGA x 1, 1 x USB 2.0, 1 x USB 3.0, Lan Port (10/100/1000) x 1
Power	5V/2A
Wireless Connectivity	On Board Wi-Fi /Bluetooth

* Due to continuous product development, the specifications may change without prior notice

** Product images are for illustration purpose only and may be different from the actual product

India's Leading EdTech Brand

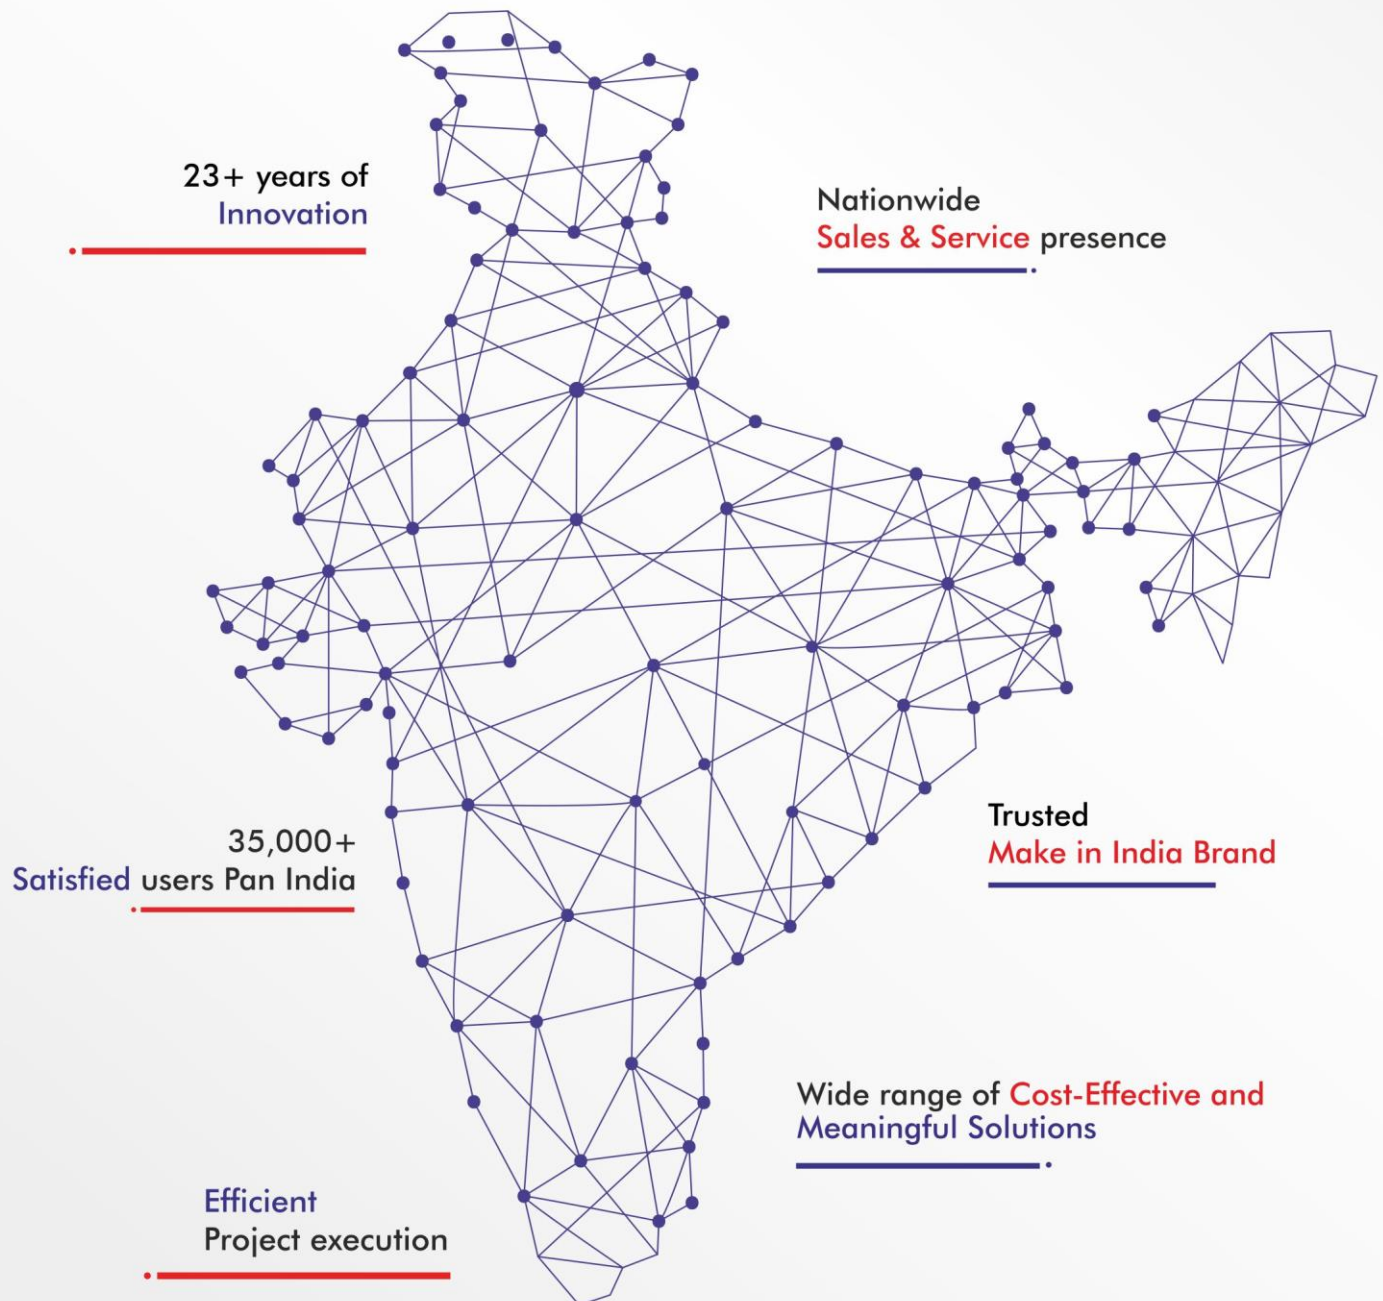

Possibilities **Unlimited**

Corporate Office: A-66, Sector-4, Noida, District Gautam Buddha Nagar, Uttar Pradesh, India- 201301 | **Mobile:** +91- 8588839434

Email: sales@globusinfocom.com | **www.globusinfocom.com**