
Nationwide Sales & Service Presence



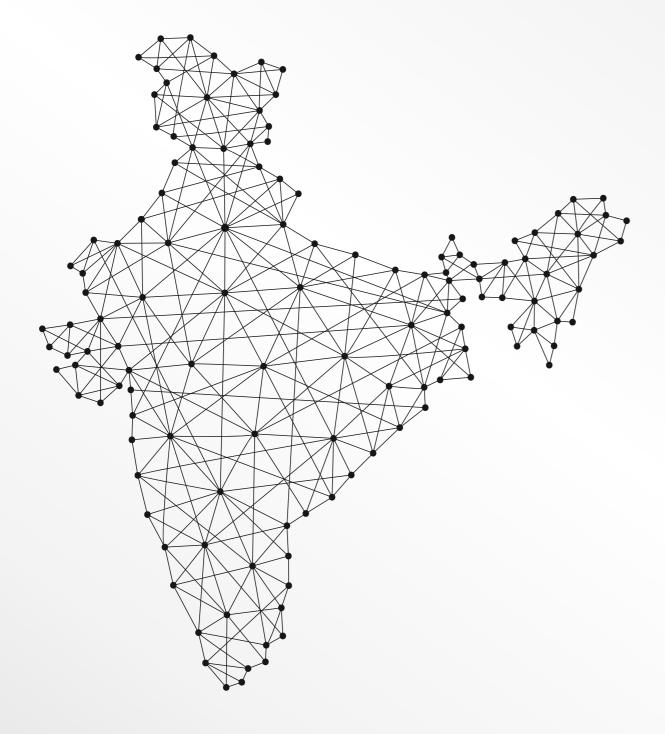

Digital Podium

Model: DP300T

A modern and well organised presentation & lecture device for seamless presentations that make two-way interaction between the presenter and audience even more efficacious.









Aesthetically-pleasing, premium design

Globus Interactive Podium is sleek, compact in form factor and premium in design, adding aesthetic value to the place it is installed. It is made up of ABS polycarbonate for a premium finish and robust design.

PCAP and Electromagnetic Touch Technology

Projected Capacitive (also PCAP) and Electromagnetic Touch Technology provide accurate and highly sensitive touch. It supports both pen as well as finger touch.





Microphones

The Gooseneck microphone comes with a dedicated On/Off button along with an LED indicator. It is powered by a Phantom Power Supply . This podium also comes with wireless microphones apart from gooseneck microphone, to make two way communication more impactful and convenient.

Single Lock for Both Slider and Cabinet



Our Smart Podium can be locked when not in use, using a single locking mechanism for both Slider and Cabinet.

Technical Specifications

Construction

Mild Steel material, sliding tray for Keyboard and mouse, flexible options in sizes for the 19"/ 21" and 22" Interactive Panel to fit in with positioning motorized up and down, top made with wood, space for the Desktop in the 21" rack for the equipment's to fit in, Sliding Shelf/Tray with Locks - For placement of extra lap top or Document and for Presenter with Internal Lock and door lock available.

LED Interactive Panel	
Construction	Positioning motorized up and down
Technology	Electromagnetic Touch Technology with Pen, Active Matrix color TFT
Size	21 inches
Resolution	1920 x 1080
Display Colour	16.7 million
Contrast Ratio	800:1
Aspect Ratio	16:9
Interface	USB
Inputs	НДМІ
Data Report	125 Reports/Sec
Touch	Work independently for the both Laptop and PC whichever source is selected PC/Laptop when both are connected to the Podium the content appear on Interactive Panel along with touch activated of the selected source, automatically without detaching or attaching a cable.
Accuracy	±0.5 mm
Max Reach Height	8mm
Pressure sensitivity	2048 Levels
Interactive Resolution	4000 Lpi (lines per inch)

Programmable Multimedia Controlle	grammable Multimedia Controller		
Ports on front Panel of Controller	17 Membrane Keys for Control, HDMI x 1, VGA x 1, 3.5mm Audio In x 1, LAN Port x 1, USB x 2, 6.35mm Mic In Port x 1, Power Plug of 220 Volt x 1		
Ports on Rear Panel of Controller	HDMI In x 2, VGA Matrix x 2, USB x 1, USB Type C x 1, Video In x 2, Video Out x 2, Audio Left x 2, Audio Right x 2, Projector Power x 1, Electric screen power x 1, HDMI Out x 1, RS232 x 1, Projector IR Controller,		
Buttons on front Panel of Controller	Projector On Off, Motorised Screen Up & Down, Switching between PC, Visual Presenter and laptop, Volume Control		
Additional Ports (left Panel)	USB 2.0 x 2, Power Plug x 1, HDMl x 1, VGA x 1, LAN x 1, Mono x 1, Audio Video x 1		
Connectivity Ports (Bottom)	LAN x 1, VGA x 1, HDMI x 2, Power Plug x 1, Gooseneck Mic Port x 1		
Integrated Port (at top of following)	HDMI, VGA, USB x 2, LAN Port, 1 x Power Plug, 1 x Video Input, 1 Audio Input, Mic Input		
Power	220 Volt AC		

Mini PC with Recording and Stream	C with Recording and Streaming Software		
Processor	Intel Core i7 12th Gen		
Wi-Fi / Wireless LAN Card	In-Built		
RAM	32 GB		
Hard Disk	256 GB SSD with 1 TB HDD		
Ports	HDMI x 1, USB ports x 4, LAN Port x 1		
Keyboard and Mouse	Wireless		
Operating System	Windows 10 Pro		

Audio System and Microphones	
System Audio (Amplifier, Speaker & Microphones)	130 watt inbuilt amplifier & 2 speakers of 3 0 Watt each and one number of wireless Hand Held mic and One number of wireless collar mic
Gooseneck Microphone	Phantom powered gooseneck microphone with XLR output, 21.5cm length, ON/OFF switch and with LED ON/OFF light, permanently polarised condensor, highly directional featuring cardioid / lobar directivity.

Power Supply	
180 -240V, 50Hz, AC Supply	

^{*}Due to continuous product development, the specifications may change without prior notice.

**Product image(s) are for illustrative purposes only and may differ from the actual product.