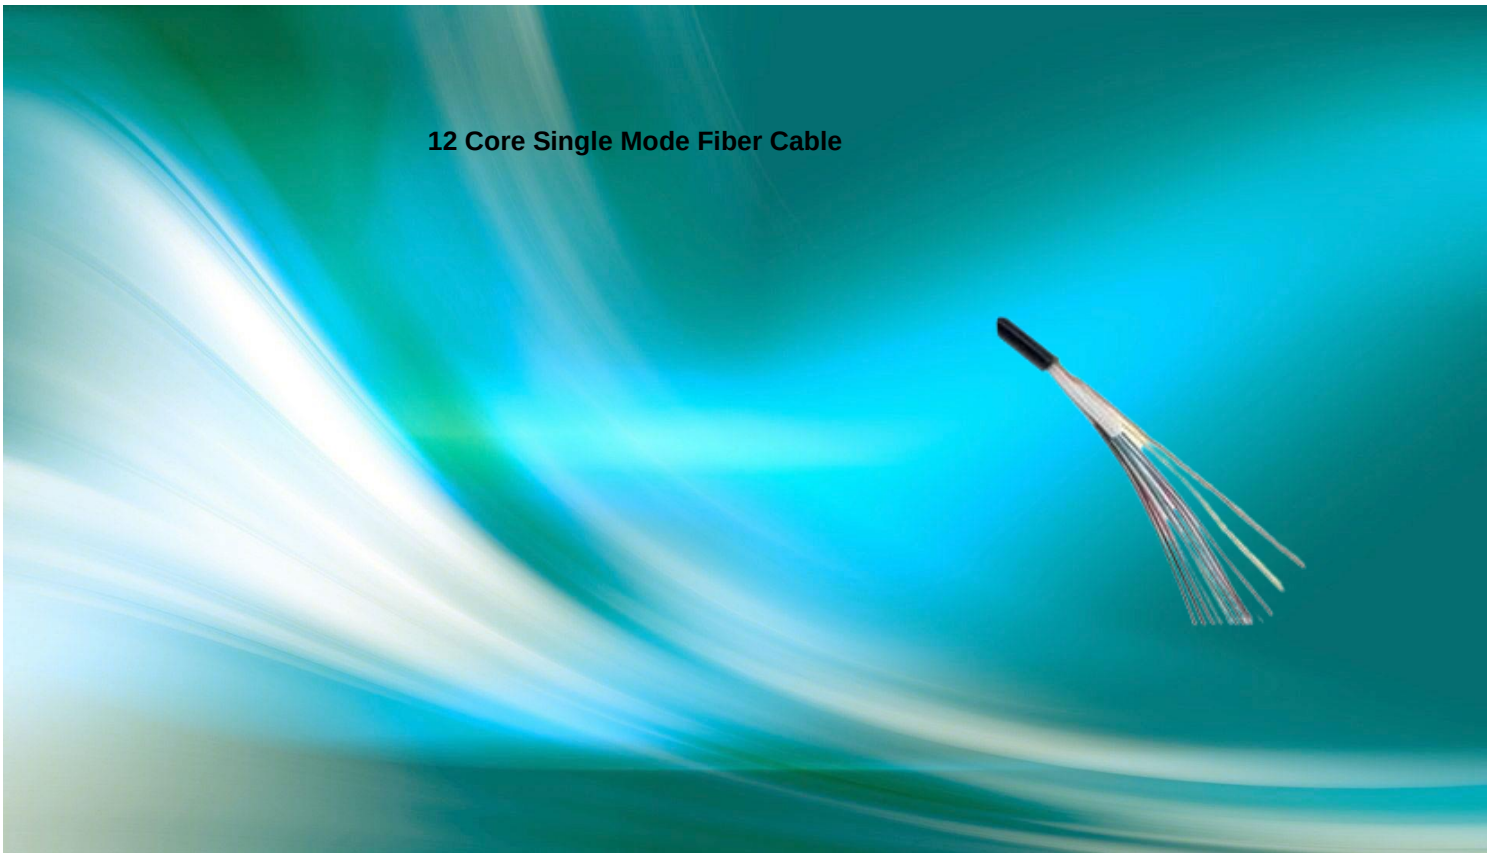

Technical Specification

GOFC12C

12 Core Single Mode Fiber Cable	
Fibre count	12
Jacket material	LSZH
Fibre type	Single mode OS1
Operational temperature range	-20 deg C to +60 deg. C
Storage temperature range	-10 to +60 deg. C
Type of tube / no. of tube / no. of core per tube	Unitube /1/12
Cable Armouring	Armoured with ECCS tape
Maximum Crush Resistance(short)	125 lbs/in (220 N/cm)
Maximum Crush Resistance(long)	63 lbs/in (110 N/cm)
Minimum Bend Radius(installation)	20 X OD
Minimum Bend Radius(in service)	10 X OD
Max Tensile load	Short term: 2700N

Installation temperature range	-30 deg C to + 60 deg C
Loose tube diameter	2.5±0.2mm

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.

For Sales ►

- Contact: 0 85888 39434
- Email: sales@globusinfocom.com

Globus Infocom Limited
A 66, Sector-4, Noida - 201301 (U.P.)
Email: info@globusinfocom.com
Website: www.globusinfocom.com
Toll Free: 1800-200-4398