


Nationwide Sales & Service Presence

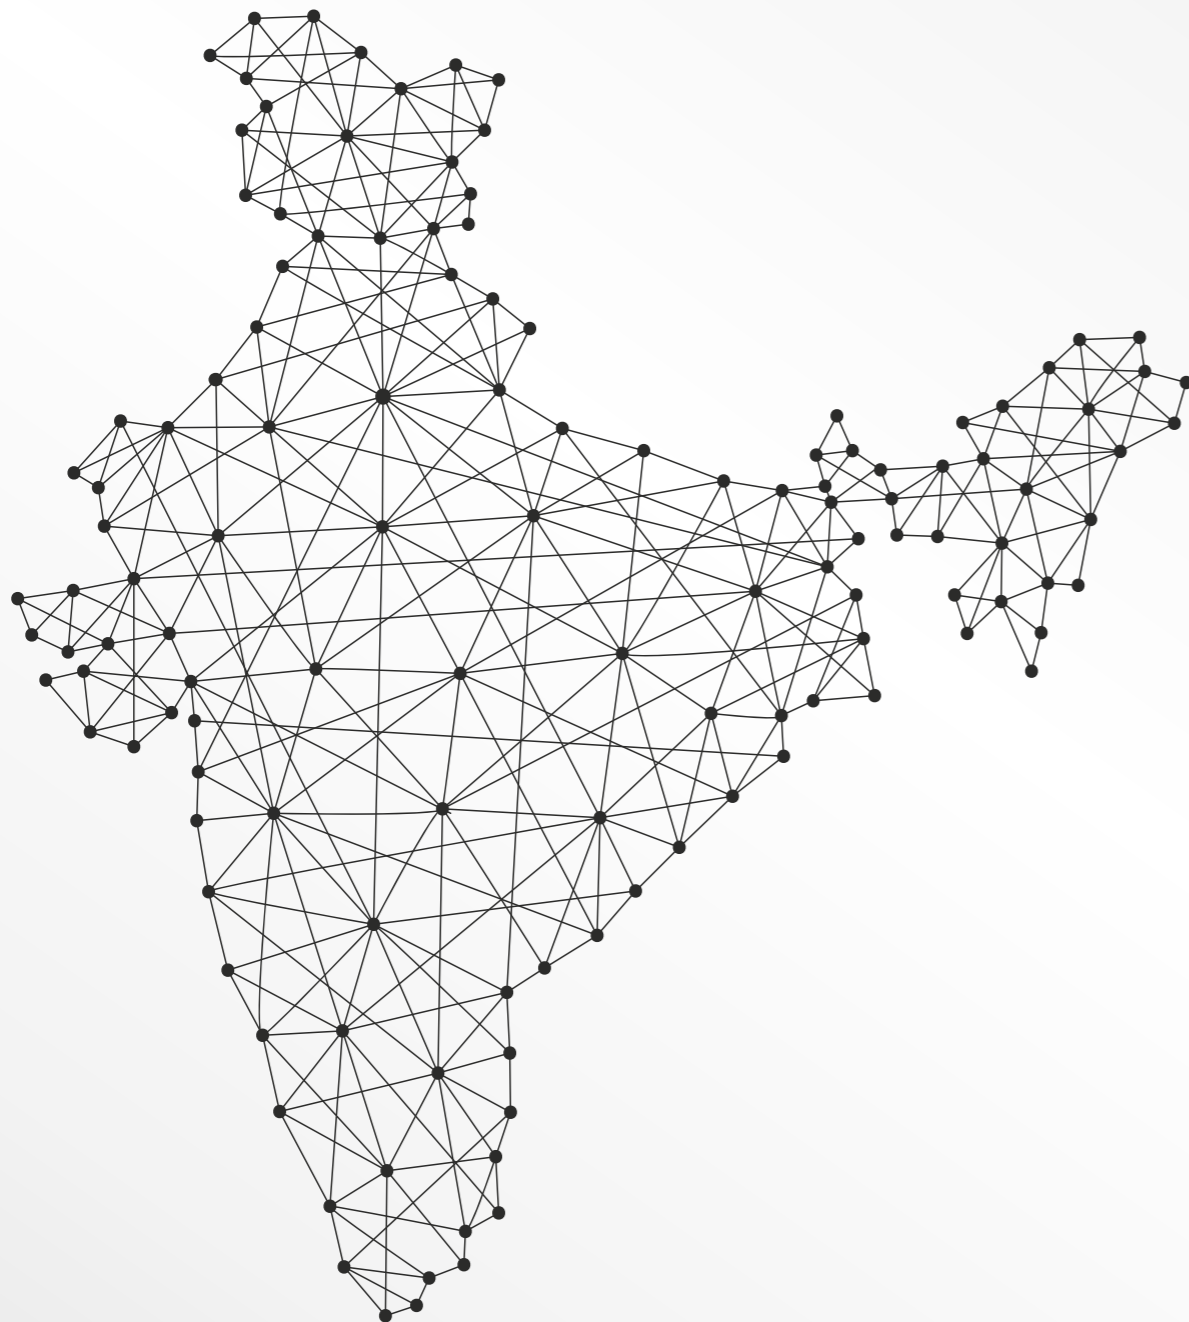

Conference Speakerphone with Expansion Microphone

Model: IMPACT GSWP 04-EX

Expand the horizons of your conferencing experience Globus Conference Speakerphone with Expansion Microphone. Onboard multi faced components like Digital Silicon Microphone, Wireless Omni-Directional Microphone and a Speakerphone, it elevates your virtual meetings into a life-like collaboration experience. Offering multiple deployment options it offers a flexible and scalable conferencing solution for businesses, be it small or large.



Powerful 2 x 10 W Speaker


Powerful inbuilt speakers with an integrated full duplex speakerphone combined with technology like echo and noise cancellation for crystal-clear audio. Includes voice prompters with frequently used functions like Mic Mute, Speaker Mute, Volume Up/Down, Expansion Microphone Switch On/Off, etc. for easier operation. With standby up to 6 months and operating time of 4.5 hours, it offers a reliable audio system for any size of conference.

Compact Omni-Directional Microphones

Combining flexibility and convenience, the solution includes three omni-directional microphones that combines noise and echo cancellation technology for comprehensible and crystal-clear audio output. Equipped with Howling Suppression and Dynamic Noise Suppression Technology, it provides opportunity for an impactful conferencing experience even in a noisy environment. Promising high reliability via RF2.4Ghz wireless connection, it operates for up to 4 hours with a single charge.



Scalable, Flexible Solution

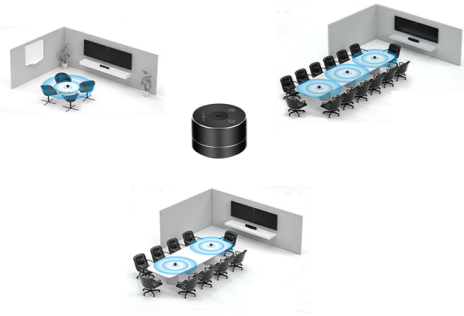

Greater functionality comes packed in a compact, small form-factor in this solution. This solution can be customized and deployed as per the requirements in just few simple steps. Depending on the size of the conference, number of omni-directional microphones can be added or removed or arrange in multiple deployment setups. This USB Plug & Play solution eliminates the need for using complex traditional connection methods that were tedious and time-taking. It comes with a Wireless Dongle (RF5.8GHz) for inter-connection for web conferencing software without any driver.

Charging Tray for Contact Charging

The solution also includes a USB type-C charging tray that offers seamless and de-cluttered contact charging for the Omni-Directional Microphones. Simply connect the tray to a USB Type-C charger to power up your microphones when not in use. It also supports fast charge for better usability.



Technical Specifications

Built-in Audio	
Type	Digital silicon Microphone
Sensitivity	Built-in Microphone: -26dBFS
SN Ratio	60dB
Frequency Response	100Hz - 16kHz
Echo Cancellation	Echo cancellation technology, echo cancellation up to 256ms
Noise Cancellation	>20dB
Sampling Rate	48K
Voice Pick up Range	5M
Transmission	RF5.8G/USB2.0 (Between main unit and PC) RF2.4G (Between main unit and expansion mics)
Speaker Consumption	Double channels 10W x 2
Battery Capacity	3400mAh x 2
Control Mode	Touch button control
Button Function	Power ON/OFF, Volume+, Volume-, Speaker mute, Microphone mute, Scene switch, Language switch etc.
Status Display	2-Color LED indicator
Power Adapter	DC 12V ±0.2V, 2A
Time	Work 4 hours, Standby Time 3 months
Temperature & Humidity	Working -10° ~ 40°, Environment 0-95% RH
Dimension	400 mm × 61 mm × 70 mm
Weight	900g

Expansion Microphone	
Type	Digital silicon Microphone
Sensitivity	-26dBm
SN Ratio	60dB
Frequency Response	100Hz - 16kHz
Sampling Rate	48kHz
Voice Pick up Range	3M
Wireless Transmission & Power	Transmission RF2.4G, Power +5dBm
Microphone Consumption	0.2W Max
Charge	USB type C / Charging tray
Control Mode	Touch Button Control
Button Function	Power ON/OFF, Microphone mute
Status Display	2-color LED indicator
Power Supply	DC5V±0.2V, 2A
Battery	800mAh
Time	Standby 6 month, Work 8 hours
Work Temperature	-10°- 40° C
Environment Humidity	0-95% RH
Dimension	φ70x49mm
Weight	200g

Charging Tray	
Power Supply	5V/2A
Support Charging Mics	2
Single Output Current	600mA
Dimension	200 mm x 100 mm x 16 mm
Weight	170g
Interface	USB Type C

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.