Application Areas


Corporate Offices

Schools, Colleges Universities

Meeting Rooms, Training Rooms

Huddle Rooms, Conference Rooms Seminar Halls

and many more…

Nationwide Sales & Service Presence

Possibilities **Unlimited**

Digital Projectors

Short Throw XGA Projectors (Impact Series)

Globus Short Throw Digital Projector is equipped with superior picture quality, long-life and reliability to amplify any lesson, meeting or seminar with vivid colours, bold graphics and razor-sharp clarity. Our short throw projectors work on DLP technology for high-end and reliable performance.

Learning made simple

GLOBUS
INFOCOM LIMITED

High Luminosity and Amazing Colour Accuracy

DLP technology produces bright and vivid images with amazing colour accuracy even in rooms with high ambient conditions. Enhance your presentation/classroom or meeting sessions with its high luminosity.
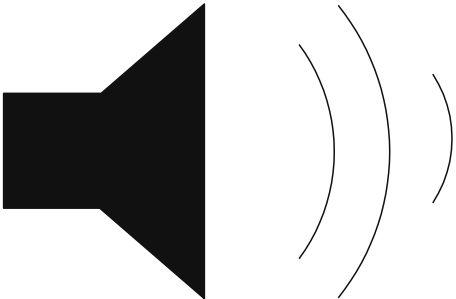
Ordinary Projector   Globus Digital Projector

Reduced Shadow Interference

With our Short Throw Projectors, interfering shadows or glare won't be a hindrance for your presentation, seminar, meeting or classroom session. It is equipped with a throw ratio as low as 0.61 that allows you to project a large screen even from a very short distance.

Inbuilt Speaker

Users can enjoy playing multimedia files like videos, animations, etc. on our Short Throw Projector with an inbuilt sound output. No hassles of connecting an external audio output device. It comes with an inbuilt 5W speaker for high fidelity sound output.

Advanced Energy Saving Features

Our projectors deliver long-term, maintenance-free operation owing to its long lamp life reducing the total cost of ownership (TCO) for the users. The Economy Mode lets users extend the lamp life by optimizing image brightness accordingly.

Technical Specification

Short Throw XGA Projectors (Impact Series)

Model	Impact-SXV	Impact-SXV1	Impact-SXV2
Projection System	\multicolumn{3}{c}{0.55" XGA}		
DMD Type	DC3		
Display Color	1.07 Billion Colors		
Native Resolution	1024 x 768 (XGA)		
Resolution Support	VGA (640 x 480) to Full HD (1920 x 1080)		
Brightness	3000 ANSI Lumens	3500 ANSI Lumens	4200 ANSI Lumens
Contrast Ratio	22000 : 1		
Lens	F=2.6, f=6.9mm		
Projection Offset	130% ±5%		
Light Source Type	Lamp		
Light Source Life (Normal Mode)	4000	5000	6000
Image Size	60"-300"		
Optical Zoom	Fixed		
Digital Zoom	0.8x - 2.0x		
Throw Ratio	0.61		
Throw Distance	0.74m-3.72m (77" @0.95m)		
Input Ports	HDMI x 1, Computer in (share with component) x 2, Composite x 1, Audio In (3.5mm) x 1		
Output Ports	Monitor Out x 1, Audio Out (3.5mm) x 1, USB Type A (Power) x 1		
Control Ports	RS232 x 1, USB Type Mini B (Services) x 1		
Keystone Adjustment	$\pm 40^{0}$ Vertical		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	15K-102KHz		
Vertical Scan Rate	23-120Hz		
Lamp Watt	190W		
Inbuilt Speaker	5W		
Audible Noise	31dB (Normal Mode); 27db (Eco Mode)		
Power Supply	100 - 240V ±10%, 50/60 Hz AC		
Power Consumption	Normal: 260W; Standby: <0.5W		
Operating Temperature	0^{0} C to 40^{0} C, 0-90% RH		
Weight	2.6 kg		
Physical Dimensions (mm)	292 x 115 x 236 (W x H x D)		
Warranty	2 Years		
Accessories	Power cable, VGA cable, remote control, user manual CD, Wall Mount Kit		
Special Features	Auto Power On/ Off, Sleep timer, Power Saving, Presentation Timer, Password Protection, Closed Captioning , 3D Blu-ray, 3D ready, audio and VGA pass through, Keypad Lock, 3x fast input, high altitude mode		

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.