


Nationwide Sales & Service Presence

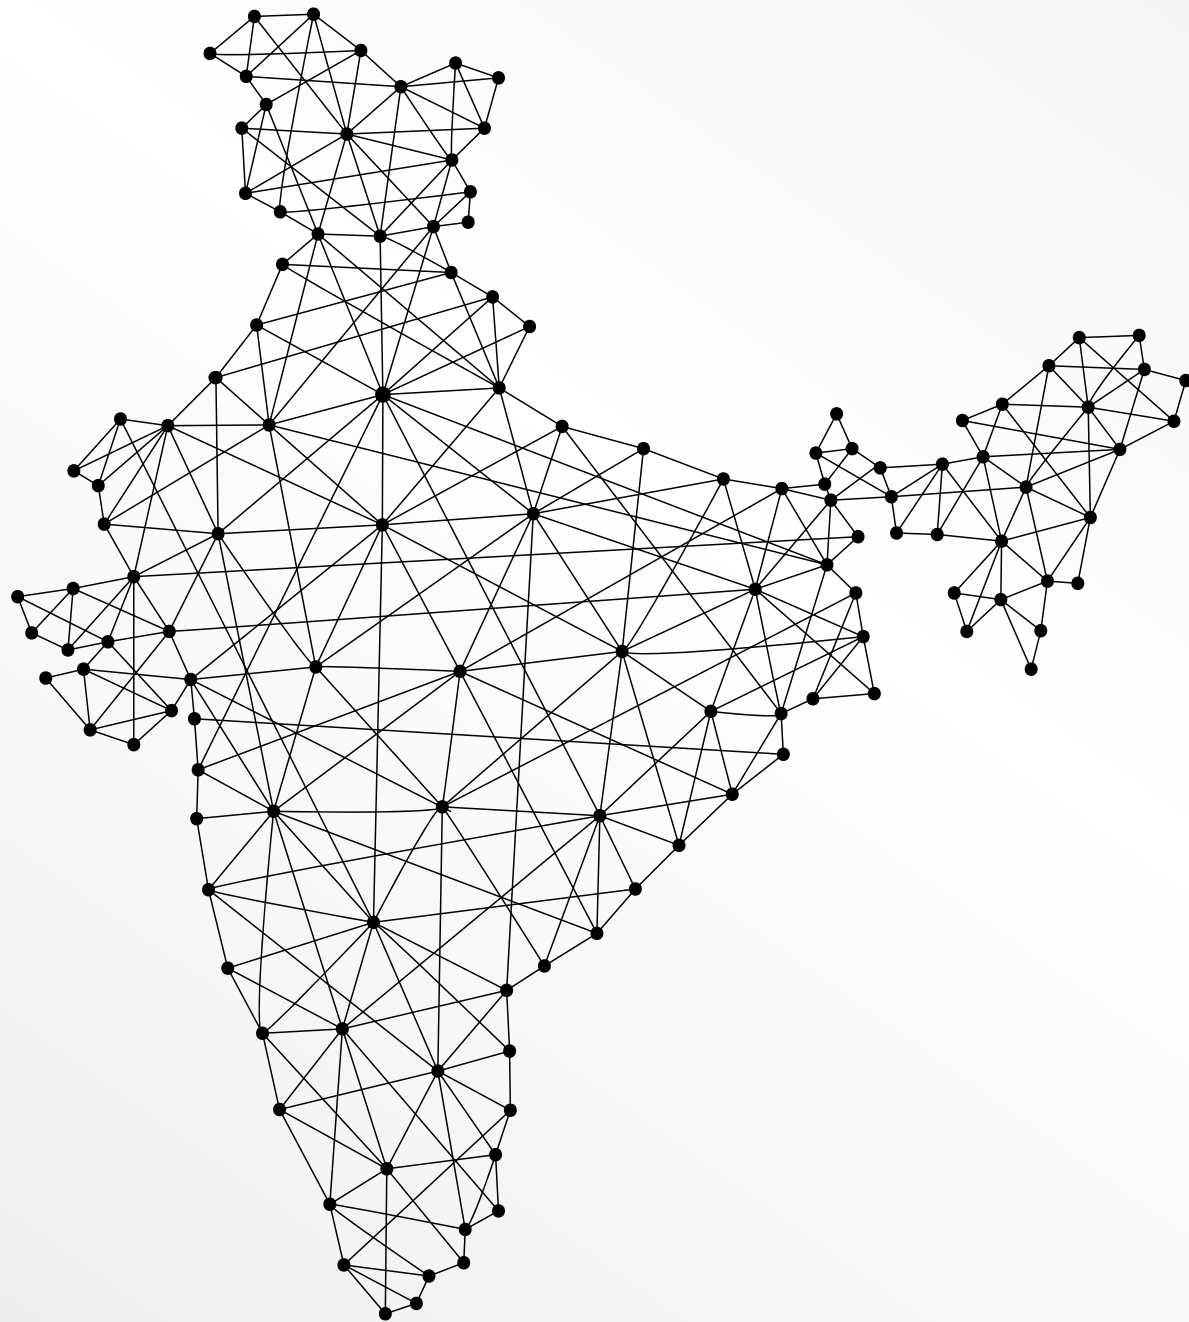

Full HD Web Cam

Avail the benefits of a high-resolution video in virtually any setting with the help of Globus Full HD Webcam. It boasts of any array of industry-leading features like Full HD CMOS sensor, low-light performance, H.264 video compression and multiple mounting options to make for a scalable video conferencing solution.

Model - Impact WC1



Full HD Lens @30 Fps

Globus Full HD Webcam delivers reliable, superior quality video conferencing experience aided by its Full HD CMOS Sensor in high frame rates. Enhance by its high-precision lens, it delivers rich, vivid and visually accurate video quality in any environment. it automatically adjusts brightness and color scales to accommodate in any environment.

Built-In Dual Microphone

For audio input, Globus Full HD Webcam is equipped with in-built dual microphone with wider pickup distance. Two highly sensitive microphones deliver exceptional audio experience, allowing every participant to be heard. With its noise-cancellation feature, it focusses on the voices that matter and cancels out ambient sound.




USB Plug & Play

To make your meetings seamless and hassle-free, our cameras offer you the best user experience in every way possible. We have designed our camera to be driver free, which means you just have to plug the camera to your device via USB interface and enjoy lag-free virtual collaboration sessions. It works efficiently on Windows, Mac, Chromebook and Linux Os.

Unparalleled Low Light Performance

CMOS Image sensor with star-level ultra-high noise ratio with enhanced light sensitivity gives you the ability to capture more light and clearer images even in poorly lit environment. It makes an ideal solution to perform optimally under any given condition to keep you prepared for a collaborative session from anywhere, anytime.

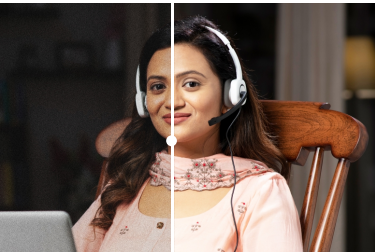

Technical Specifications

Model: Impact WC1

Full HD Web Cam	
Effective Pixel	2M
Output Resolution	H.264(30fps): 1920×1080p; 1280×720p;1024×576p; 960×540; 800×600; 640×480; 640×360; 480×270; 352×288; 320×240 ; MJPG(30fps): 1920×1080p; 1280×720p;1024×576p; 960×540; 800×600; 640×480; 640×360; 480×270; 352×288; 320×240 ; YUY2: 640×480; 640×360; 480×270; 352×288; 320×240
Output Format	MJPEG, H.264, YUY2
Focus Method	Fixed
Focus Distance	1.0m
Maximum field of view FOV	78°
Aperture	2.0
Minimum Illumination	10Lux

Microphone Parameters	
No. Microphone	2
Pickup Distance	0~4m

I/O Interface	
USB port	1 (Type-C)

Accessories	
USB Cable	1

Environmental Conditions	
Operation Temperature	0°C~40°C
Operation Humidity	10%~90%RH
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%

Physical Specifications	
Size	71×56×96mm
Net weight	54g

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.