
Nationwide Sales & Service Presence





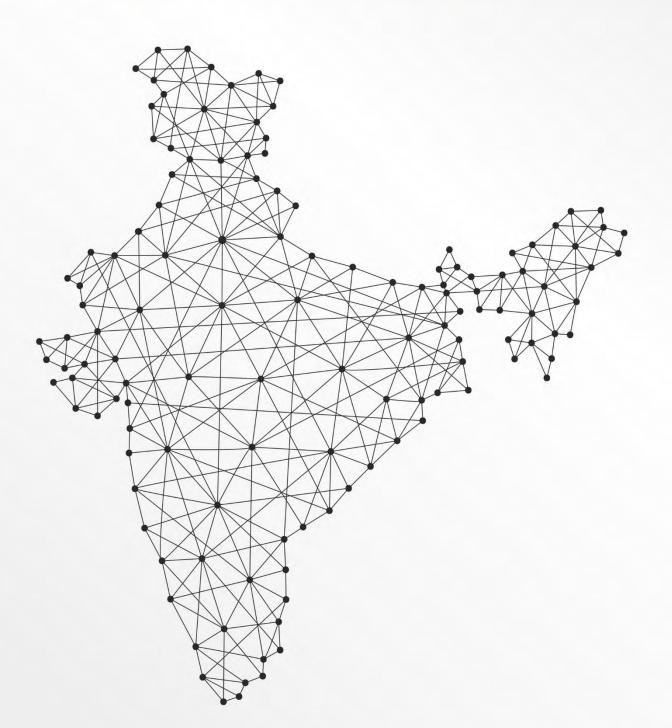

Interactive Display

Model: IMPACT X75-V10

Globus Interactive Display is an advanced, next-generation touch display with utmost usability and interactivity. Our professional-grade displays deliver life-like picture quality and an immersive experience aided by its high brightness, super-responsive IR-based touch and in-built sound system.



Corporate Office: A-66, Sector-4, Noida, District Gautam Budh Nagar, Uttar Pradesh - 201301, India | Phone: +91-120-4051700, 4051800 Email: info@globusinfocom.com | www.globusinfocom.com Learning made simple



Technical Specification

Model	IMPACT X75-V10
Technology	DLED backlight technology, ensuring a vibrant display with IPS (In-Plane Switching) capabilities
Display size (Diagonal)	75 inches
Display Color	10-bit color depth, offering a spectrum of 1.07 billion vibrant colors
Resolution	3840 x 2160 (4K)
Aspect Ratio	16:9 (Landscape)
Viewing Angle	178ºHorizontal / 178ºVertical
Brightness	350 cd/m ²
Contrast Ratio	1100:1
Response Time	3 ms
Working Hours	50,000 Hours
I/O Ports	Input: HDMI (2.0) x 2, USB (3.0) x 1, OPS Slot x 1, USB-C (3.1) x 1; Output: HDMI (2.0) x 2
Communication Port	RJ45 (LAN) x 1
Buttons	Volume UP/Down, Home, Back, Menu, Touch on/off & Power Buttons
Refresh Rate Frequency	60Hz
Wireless Connectivity	Inbuilt Dual band Wi-fi (2.4 & 5Ghz), Bluetooth 5.0 with Power Indicator
Smart USB	All USB ports are equipped to support Sharing Mode with Android devices, Internal PCs, or other external PCs/devices
Built-In Speakers	Stereo Sound with in-built 10-Watt x 2 speakers
OS Support	System is compatible with Windows 10, Windows 8, Windows 7, Linux, Mac, and Android operating systems. It features an embedded player CPU.
Virtual Keyboard	Inbuilt virtual keyboard with English to Hindi writing support.
Pen Holder	Frame/Structure with inbuilt magnetic mechanism to hold upto two numbers of Pen
PCB Protective Coating	Conformal Coating on PCB to prevent from Humidity, Dust & Iron Particles
Security	Lock USB port, Screen Lock, application lock to restrict unwanted access.
Working Voltage	AC 100-240V, 50/60 Hz
Power Consumption	225 Watts, Standby: ≤0.5W

Built In Standard OS		
Android Version	11	
CPU	Dual core A73+Dual core A53	
RAM	4 GB	
Storage	16 GB	
Storage Conditions / Packing Information		
Working Temperature /	$0^{\circ}C \sim 45^{\circ}C / 0\%-95\%$ RH	

Humidity	
Dimensions	1712 x 1030 x 88mm
Mounting	Wall-mounted
Standard Accessories	Wall mount kit, Power Cord, User Manual/Quick Serv All connecting Cables and accessories, Pen/stylus x 2

_	Certificates
_	BIS, CE, FCC, ROHS



Touch

Touch	
Туре	3.0 T, Anti-Glare, Scratch resistant
Touch accuracy	± 2.0 mm
Touch Type	IR Infrared
Touch On/Off	Available on Front of Display
Touch Method	Finger/Pen with dual mode option
Response Time	8 ms
Air Gap Between LCD Module & Glass	1 mm
Touch Points	20 points Multi Touch
Communication Interface	USB

Interactive Classroom Suite

White Board, Writing, Pen, Palm Eraser, Save, QR Code Sharing option, Screen Capture, Storage, Tool Bar etc, Security function Password and Source lock, Screenshots, Lock, Share through Email, Update to network disk/drive, Bring the saved memo from the export of memo, black board (Annotation), Menu, File Management, Internet tab or more on the main screen,

Special Features

- In built quiz tool to allow participants to submit answers from their Smart Phones (Answering/Voting/Messaging), built in Screenshot, Screen recording feature supports up to full HD resolutions.
- Support software based VC with internal android platform like Google meet, Cisco WebEx , Skype, Microsoft teams & zoom applications.
- Screen Share/Mira cast to Connect TAB/Mobile, Web Browser
- HEVC Decoder for zoomed in various documents, images & Videos can be displayed without any distortion.

*Due to continuous product development, the specifications may change without prior notice. **Product image(s) are for illustrative purposes only and may differ from the actual product

ervice Guide, Regulation Book, IR Remote Control with batteries,