


Application Areas




Corporate Offices

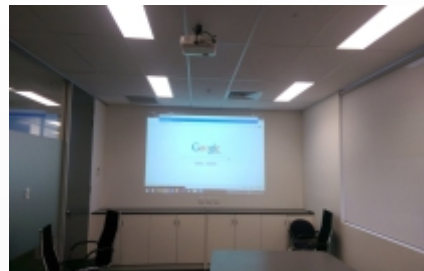

Schools, Colleges
Universities



Meeting Rooms,
Training Rooms

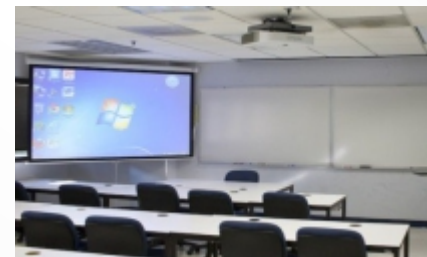

Huddle Rooms,
Conference Rooms
Seminar Halls

and many more...



Digital Projectors

Short Throw WXGA Projectors (Impact Series)

Globus Short Throw Digital Projector is equipped with superior picture quality, long-life and reliability to amplify any lesson, meeting or seminar with vivid colours and razor-sharp clarity. Our Short Throw Projectors work on DLP technology for high-end and reliable performance.

Nationwide Sales & Service Presence



Corporate Office: A-65, Sector-4, Noida, District Gautam Budh Nagar,
Uttar Pradesh - 201301, India | **Phone:** +91-120-4051700, 4051800
Email: info@globusinfocom.com | **www.globusinfocom.com**





High Native Resolution for Razor-Sharp Picture Quality

Elevate your presentation or classroom session by several notches with WXGA resolution of Globus Short Throw Digital Projectors. Highlight even the minute details of your document for better collaboration with its wide colour gamut and high visual performance.



Immersive Audio Experience

In-built sound system of 10W to power your presentation, seminar or classroom sessions without requiring any additional sound setup for a small to medium sized room.



High Brightness for Spectacular Visual Performance

High brightness of 4000 ANSI Lumens and High Contrast Ratio of 22000:1 for razor-sharp and luminous picture quality in any given lighting condition be it too dark or too bright.



Perfectly Geometrical Images with H/V Keystone Correction

Vertical/Horizontal Keystone Correction of $H:\pm 26^\circ$, $V:\pm 40^\circ$ for obtaining perfect geometrical shape of the projection, eliminating trapezoid effect without moving the projector physically. The keystone can be adjusted via remote control.

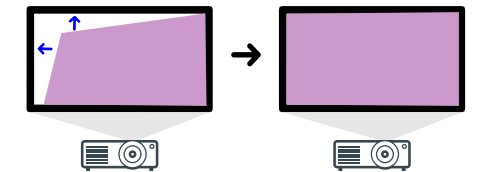

Throw Ratio of 0.49

Optimum Throw Ratio of 0.49 to project clear, high quality images even from very small distance with no distracting shadows on the screen image, offering excellent projection

LAN and HDMI Port

Globus Short Throw Digital Projectors are equipped with 2 HDMI and a LAN Port for easy connectivity and efficiency. The LAN Port allows remote operation and management of the projector when connected on an internal network for greater flexibility of use.







Longer Lamp Life

Our projectors deliver high-end visual performance and maintenance-free operation owing to its long lamp-life of 10,000 hours in Normal Mode, reducing the total cost of ownership (TCO) for the users. The Eco Mode lets users extend the lamp life by optimizing image brightness according to the ambient lighting.

Digital Zoom of 0.8x-2.0x

Globus Short Throw Projector comes with the Digital Zoom of 0.8x-2.0x for greater flexibility in projection and high quality picture.

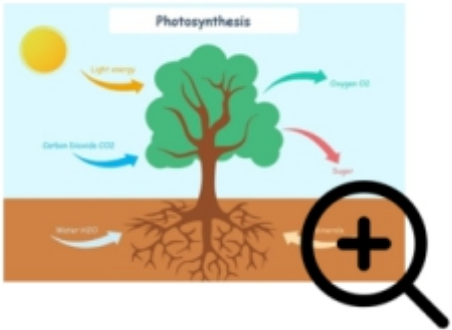

Light Weight, Compact Form Factor

Globus Short Throw Digital Projectors are compact in form factor and lighter in weight. It makes transportation and installation easier and also blends perfectly into any environment with its premium design

Technical Specification

Short Throw WXGA Projector			
Model	Impact-SWV3	Impact-SHDV4	Impact-SWV5
Projection System	0.65" WXGA		
DMD Type	Dc3		
Display Color	1.07 Billion Colors		
Native Resolution	1280 x 800 (WXGA)		
Resolution Support	VGA (640 x 480) to Full HD (1920 x 1080)		
Brightness	4000 ANSI Lumens		
Contrast Ratio	22000 : 1 (with SuperEco mode)		
Lens	F=2.6, f=6.9mm		
Projection Offset	110% ±5%		
Light Source Type	Lamp		
Light Source Life (Normal Mode)	10000	11000	12000
Image Size	60"-300"		
Optical Zoom	Fixed		
Digital Zoom	0.8x - 2.0x		
Throw Ratio	0.49		
Throw Distance	0.63m-3.17m (87" @0.92m)		
Input Ports	HDMI x 2, Computer in (share with component) x 2, Composite x 1, Audio In (3.5mm) x 1		
Output Ports	HDMI x 2, Computer in (share with component) x 2, Composite x 1, Audio In (3.5mm) x 1		
Control Ports	Rs232 x 1, USB Type Mini B (Services) x 1		
Keystone Adjustment	H:±26° , V:±40°		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	15K-102KHz		
Vertical Scan Rate	23-120Hz		
Lamp Watt	200W		
Inbuilt Speaker	10W		
Audible Noise	31dB (Normal Mode); 27db (Eco Mode)		
Power Supply	100 - 240V ±10%, 50/60 Hz AC		
Power Consumption	Normal: 260W; Standby: <0.5W		
Operating Temperature	0° C to 40° C, 0-90% RH		
Weight	2.6 kg		
Physical Dimensions (mm)	292 x 115 x 236 (W x H x D)		
Packaging Dimensions (mm)	365 x 188 x 300 (W x H x D)		
Accessories	Power cable, VGA cable, remote control, user manual CD		
Special Features	4 Corner Adjustment, LAN Control, Network Control, Super Color, Auto Power On/ Off, Sleep timer, Power Saving, Presentation Timer, Password Protection, Closed Captioning , 3D Blu-ray, 3D ready, audio and VGA pass through, Keypad Lock, 3x fast input, high altitude mode		

*Due to continuous product development, the specifications may change without prior notice.
**Product image(s) are for illustrative purposes only and may differ from the actual product.