

# Globus Panel

*22 Inch Two Point Touch LED Display  
Works in conjunction with Interactive Board,  
Pad and Visualizer*

GP-22KLP




## ★ Advanced Feature



# Specifications

## GP-22KLP

<b>Screen Size</b>	21.5"
<b>Panel</b>	Active Matrix Color TFT
<b>Panel Surface</b>	Hard Coating (8H)
<b>Tilt</b>	20° ~ 5°
<b>Backlight</b>	White-Light LED
<b>Backlight Life</b>	50,000 Hrs. Min.
<b>Native Resolution</b>	1920 x 1080
<b>Response Time</b>	5 ms
<b>Viewing Angle</b>	H:170°, V: 160°
<b>Luminance of White</b>	350 cd/m <sup>2</sup>
<b>Contrast Ratio</b>	1000:1 (Typical), 20,000,000:1 (Dynamic)
<b>Horizontal &amp; Vertical Frequency</b>	H: 24~83 kHz, V:50~76 Hz
<b>Video Signal Input</b>	RGB (Analog), DVI-D (Digital)
<b>Connectors</b>	D-Sub x 1, DVI x 1, USB x 2 (Type A/ Type B)
<b>Audio</b>	3.5mm Jack
<b>Speaker</b>	2W x 2
<b>Power Supply Type</b>	External adapter, 3 Pin Plug
<b>Power Supply</b>	AC 100~240V, 50 / 60Hz
<b>Power Consumption</b>	36 watts, saving mode: <18watt
<b>Operating Temperature</b>	0-40° C, 20%-90% RH
<b>Weight</b>	4.9 kgs Net
<b>Wall Mount</b>	100 mm x 100 mm
<b>Dimensions</b>	511 x 365 x 240 mm (including stand)
<b>Accessories</b>	Power Cable x 1, AC/DC Adaptor x 1, VGA Cable x 1, Audio Cable x 1, DVI Cable, USB Cable x 1

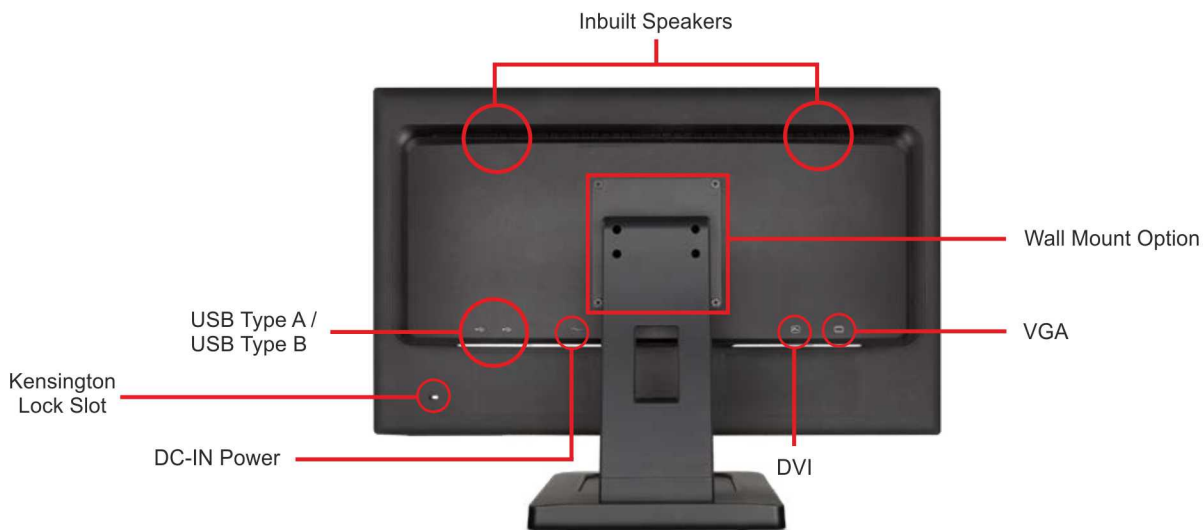

*\*Due to continuous product development, the specifications may change without prior notice.*

*\*\*Product image(s) are for illustrative purposes only and may differ from the actual product.*

### For Sales

**Contact:** +91 8588839434    **Email:** sales@globusinfocom.com



**TOLL FREE**  
1800-200-4398

### Globus Infocom Ltd.

A-22, Sector-4, NOIDA - 201301

District Gautam Budh Nagar (Uttar Pradesh) INDIA

Tel: +91-120-4051700, 4051800, Fax: 0120 - 4051827 / 726

E-mail: info@globusinfocom.com, Website: www.globusinfocom.com

